




LINEAR KINETIC CELL Water Conditioning System

POWER SUPPLY UNIT

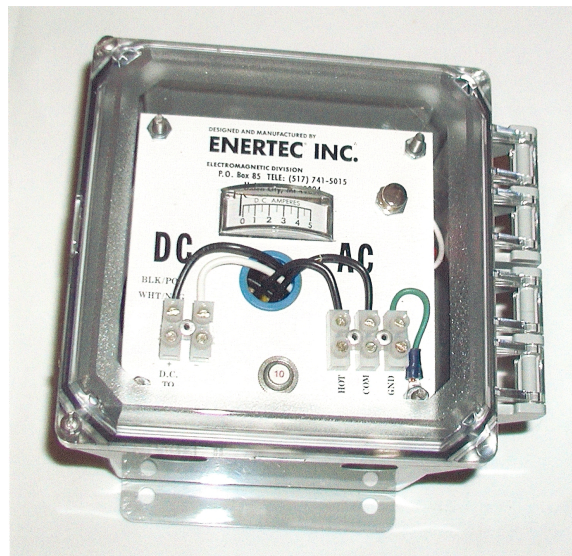

AC Input - 110Vac or 220Vac;
50 or 60 Hz, Single Phase

DC Output - 0 - 90 VDC, 4 Amps, Continuous Duty.
With built in potentiometer for field adjustment of flux energy / amperage if required.

Meets Nema 12/4X electrical codes with overload protection with manual reset circuit breaker, and automatic voltage regulator (AVR) and all solid state electronics.

Enclosure - Standard - Non-metallic with Clear cover for visibility of operating amperage.
Optional - Stainless Steel or explosion proof enclosures are available upon request.

Added

Features - Alarm output for connection to external audio/visual alarm devices or SCADA system,
available upon request.